Product leaflet

NCF DX



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

NCF DX

ATEX approved NCF DX fans
Nederman NCF DX are powerful central fans with a robust construction of welded steel. The NCF DX is approved for combustible dust in zone 22 in accordance with ATEX directives 2014/34/EC Group 2, Category 3.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

NCF DX

Certifications	CE, EX
Ambient temperature range	-30 to +40 °C (-22 F to 104 F)
Power Voltage (V)	400
Frequency (Hz)	50
No of phases	3

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item number	Amperage (A)	[ItemNoiselevel]	Weight (kg)	Power (kW)
	14530128	10,3	75 db(A) vid 4000 m3/h	110	5,5
	14530228	13,8	78 db(A) at 3500 m³/h	120	7,5
	14530328	20	77 db(A) at 6000 m³/h	205	11
	14530428	26,5	82 db(A) vid 8000 m³/h	232	15
	14530528	39,5/22,7	85 db(A) vid 10000 m³/h	319	22

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Inlet adap. d250,30/15,40/25,50/25	14374438
	Inlet adapter d400, 80/20, 120/25	14374440
	Inlet adapter d500, 120/15, 160/25	14374441
	Outl. adap.288x205 d315,30/15,40/25	14374442
	Outl.adap.361x256 d400,80/20,120/25	14374444
	Outl.adap.453x322d500,120/15,160/25	14374445
	Outl.adap.256x183 d250, 50/25,30/20	14374446
	Flex.inl.ad..d250,30/15,40/25,50/25	14374447
	Flex.inlet.adap.d400, 80/20, 120/25	14374449
	Flex.inlet.adap.d500,120/15,160/25	14374450
	Flex.out.a.288x205 d315,30/15,40/25	14374451
	Flex.out.a.361x256d400,80/20,120/25	14374453
	Flex.ou.a.453x322d500,120/15,160/25	14374454
	Flex.ou.a.256x183 d250, 50/25,30/20	14374455
	Inl.guardnet d250,30/15,40/25,50/25	14374456
	Inlet guard net d400, 80/20, 120/25	14374458

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item number
	Inlet guard net d500,120/15,160/25	14374459
	Outlet guard net, 30/15, 40/25	14374460
	Outlet guard net, 80/20, 120/25	14374462
	Outlet guard net, 120/15, 160/25	14374463
	Outlet guard net, 50/25	14374464

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

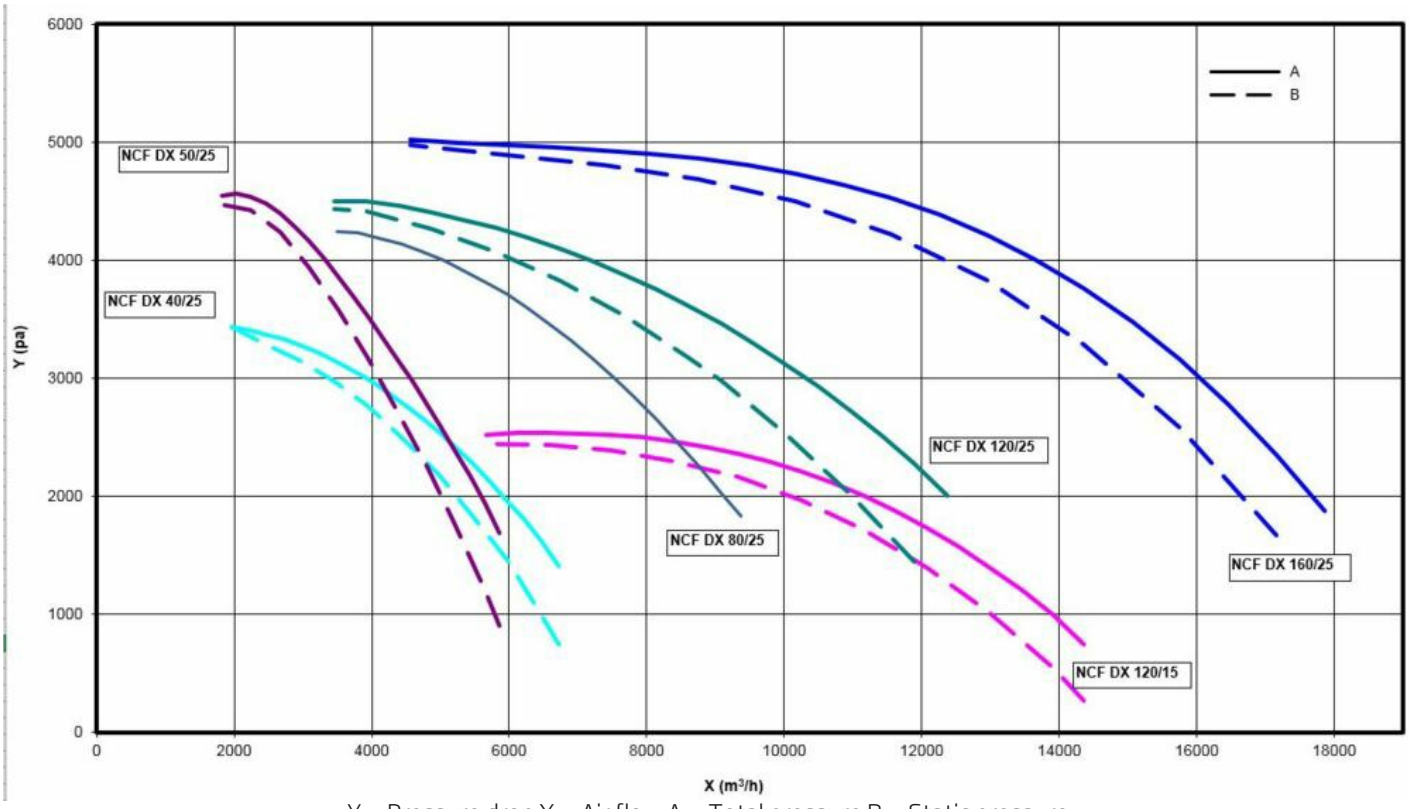

Y = Pressure drop X = Air flow A = Total pressure B = Static pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB