UPLIFTING COMPANY

AUTOP STENHOJ



# Mascot 2-post lifts

with 4.0 and 5.5 t lifting capacity
Electro-hydraulic: Mascot 40 H II, 40 HB, 55 H
Electro-mechanical: Mascot 40 M II

VERTICAL POWER

**Surface-mounted lifts**

**The highlights of the Mascot series:**

- Low minimum height
- Stable, bent posts
- Powerful drive-concepts
- Universal lifting area
- Premium features in the standard version

**Multifunctional workstation with very good lifting area!**

# When it comes to a high level, you should be sure to pay attention to the details.

**Mascot series:**

The 2-post lifts from the Mascot series are convincing as multifunctional workstations with a very good lifting area and a low minimum height, in accordance with the specifications of leading car manufacturers.

**Mascot H - hydraulic**
The Mascot lifts are equipped as standard with a valve that can reduce the lowering speed. This is particularly useful when removing high-voltage batteries and a slow and controlled lowering of the vehicle is needed.

Mascot lifts can be switched from the standard setting – a short lift before lowering – to immediate lowering using a switch on the control unit.

For optimum workplace efficiency, the Mascot series has a second control unit on the counter-column, incl. compressed air and power supply.

The Mascot lifts all have a reliable hydraulic system and guarantee long service life with low running costs.

**Mascot M - electro-mechanical**
The Mascot electromechanical lift is characterised by the use of our cold-rolled spindle.
The design is based on our proven hydraulic models – this is how we use existing synergies, reduce the amount of material used and create a sustainable, marketable product with maximum added value.
**Simple. Strong. Future-proof.**

# Mascot 40 M II

## **Elektro-mechanical** 2-post lift with 4.0 t capacity

**Standard colour:**
- Arms: RAL 3020
- Posts: RAL 7016

**Optional extras:**
- Available with different portal heights
- LED-lighting
- Set of expansion bolts
- Base plate extension for poor ground conditions
- Large program of extra pads, depending on type of vehicle

**Standard:**
- Asymmetrical positioning of the posts
- 360° arm locking system
- Suitable for wheel-support devices

## Technical data

| | **Mascot 40 M II** |
|---|---|
| **Lifting capacity** | 4000 kg |
| **Lifting height** | 1900 mm |
| **Working height** | 1995 - 2073 mm |
| **Lifting / lowering time** | ~ 40 sec. |
| **Motor** | 2x2.8 kW |
| **Voltage** | 3x230/400V - 50Hz - 25/16A |

| | |
|---|---|
| **Adjustment range of lifting pads** | F: 95-174 mm |
| **Min. height** | 95 mm |
| **Drive-through width** | 2407 mm |
| **Width between posts** | 2753 mm |
| **Total width outer edge base plates** | 3500 mm |
| **Total height post** | 2980 mm |
| **Arm length front, min-max.** | F DT: 605-1255 mm |
| **Arm length rear, min-max.** | F DT: 740-1455 mm |

Expected to be available from 2026


# Mascot 40 M II

## **Electro-mechanical** 2-post lift with 4.0 t capacity





Mascot 40 M II

Expected to be available from 2026

# Mascot 40H II, 40HB, 55H

UPLIFTING COMPANY AUTOP STENHOJ

## **Electro-hydraulic** 2-post lift with 4.0 & 5.5 t capacity

**Standard colour:**
- Arms: RAL 3020
- Posts: RAL 7016

**Optional extras:**
- Available with different portal heights
- LED lighting
- Set of expansion bolts
- Base plate extension for poor ground conditions
- Large program of extra pads, depending on type of vehicle

**Standard:**
- Control unit on both columns
- Control units with integrated compressed air and electrical connection
- Switch for slow lowering
- Switch for direct lowering, without lifting from the latch

## Technical Data

| | Mascot 40 H II | Mascot 40 HB | Mascot 55 H |
|---|---|---|---|
| **Lifting capacity** | 4000 kg | 4000 kg | 5500 kg |
| **Lifting height** | 1870 mm | 1900 mm | 1900 mm |
| **Working height** | 1965 - 2043 mm | 1995 - 2071 mm | 2000 - 2047 mm |
| **Lifting / lowering time** | ~ 40 sec. | ~ 40 sec. | ~ 50 sec. |
| **Motor** | 3 kW | 3 kW | 3 kW |
| **Voltage** | 3x230 / 400 V-50 / 60Hz – 16 A | 3x230 / 400 V-50 / 60Hz – 16 A | 3x230 / 400 V-50 / 60Hz – 16 A |
| **Adjustment range of lifting pads** | F: 95 - 174 mm | F: 95 - 171 mm | F: 100 - 147 mm |
| **Min. height** | 95 mm | 95 mm | 100 mm |
| **Drive-through width** | 2404 mm | 2512 mm | 2784 mm |
| **Width between posts** | 2753 mm | 2780 mm | 3317 mm |
| **Total width outer edge base plates** | 3500 mm | 3500 mm | 3832 mm |
| **Total height post** | 3995 + 225 mm | 2841 I 3430 mm | 4015 mm |
| **Arm length front, min-max.** | F DT: 605 - 1255 mm | F DT: 600 - 1250 mm | F DT: 915 - 1850 mm |
| **Arm length rear, min-max.** | F DT: 740 - 1455 mm | F DT: 600 - 1250 mm | F DT: 915 - 1850 mm |

Expected to be available from 2026

Mascot 40H II, 40HB, 55H

UPLIFTING COMPANY AUTOP STENHOJ

**Electro-hydraulic** 2-post lift with 4.0 & 5.5 t capacity




Mascot 40 H II





Mascot 55 H

Mascot 40 HB


# Mascot 40 H II

**Electro-hydraulic** 2-post-lift with 4 t capacity

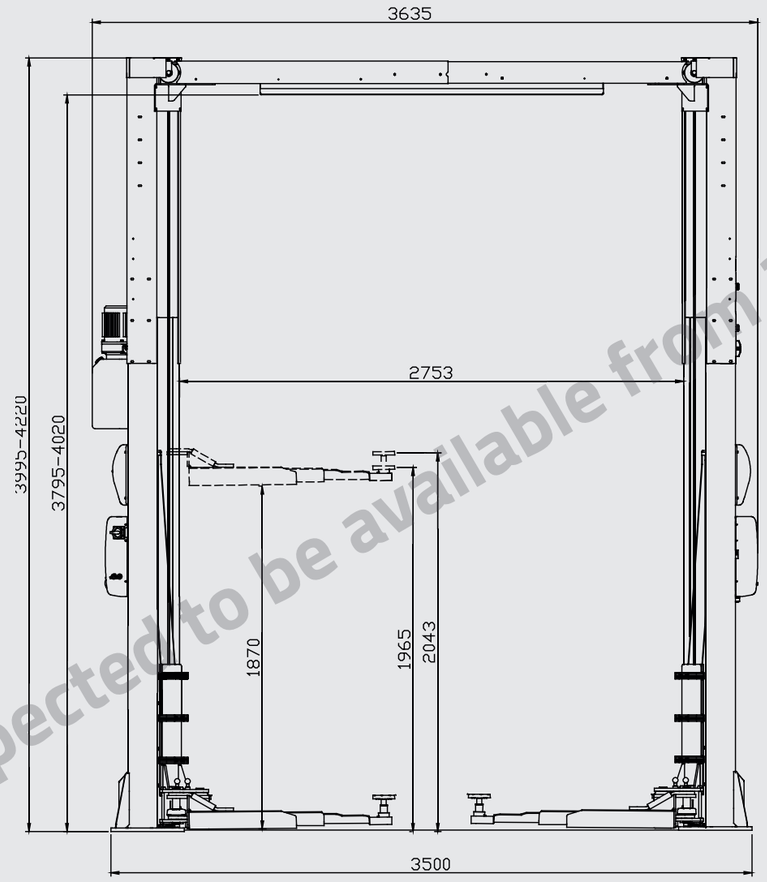


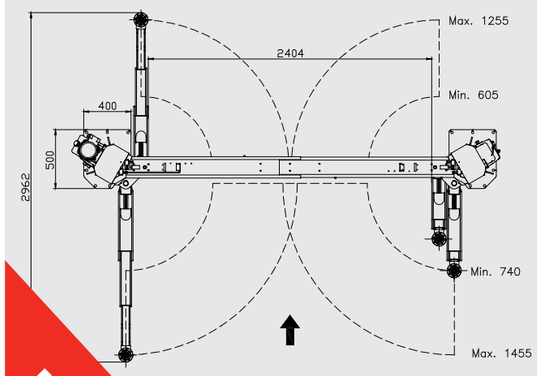
Short arm

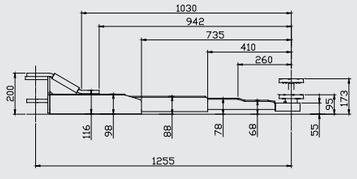


Long arm

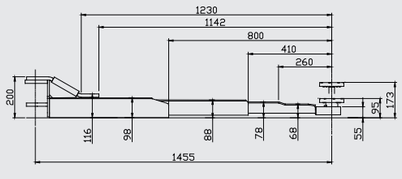



NEW


Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 11/2025.


Expected to be available from 2026

# Mascot 40 HB

**Electro-hydraulic** 2-post lift with 4 t capacity

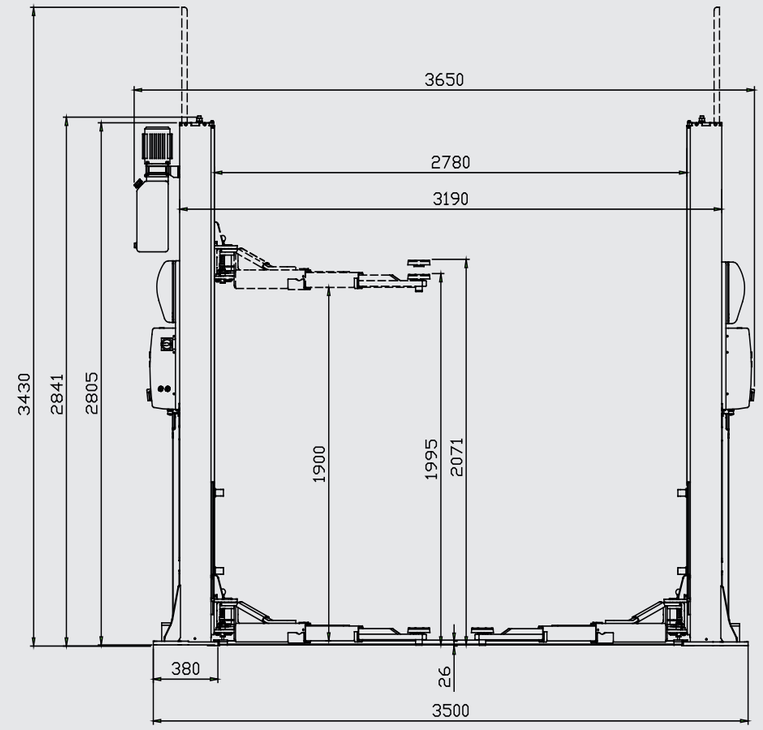

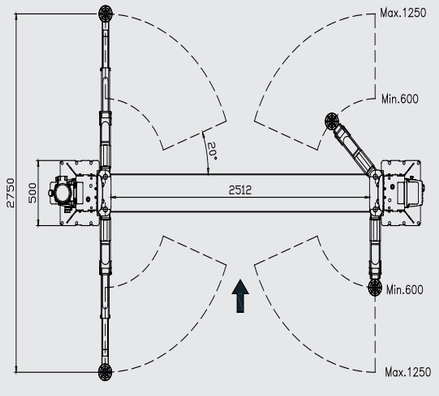


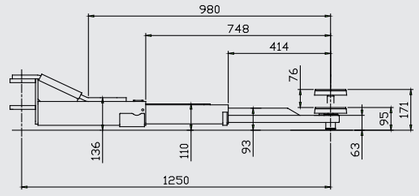
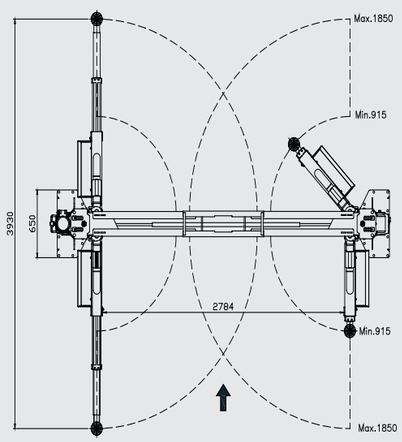



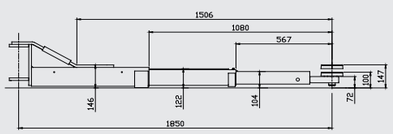

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 11/2025.

# Mascot 55 H

**Electro-hydraulic** 2-post lift with 5.5 t capacity

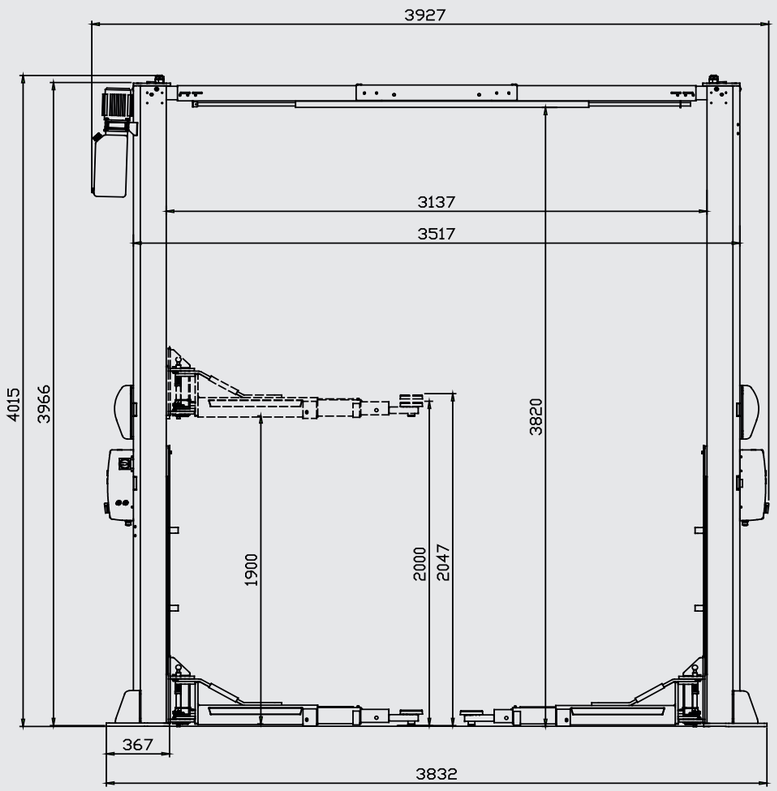





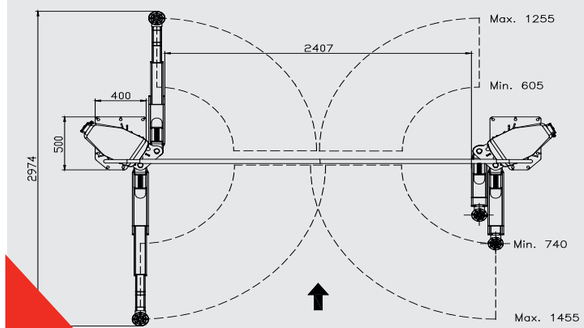

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 05/2025.

# Mascot 40 M II


**Electro-mechanical** 2-post lift with 4 t capacity

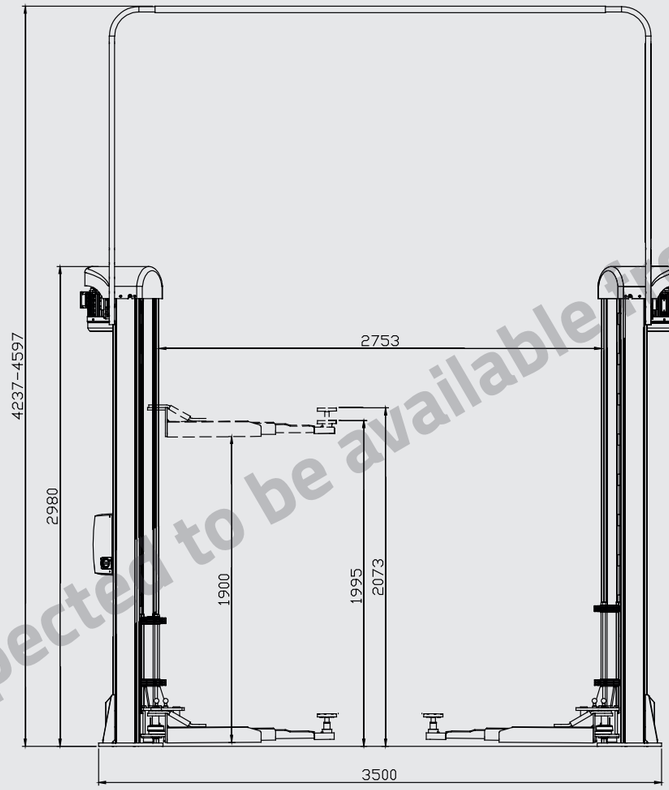



Expected to be available from 2026




Short arm

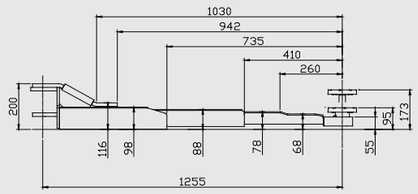


Long arm

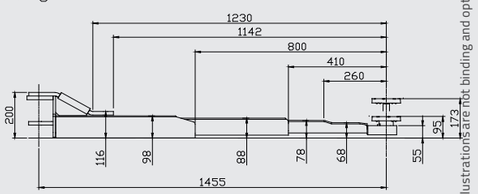


NEW

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 05/2025.


# Mascot 40H II, 40HB, 55H & 40 M II










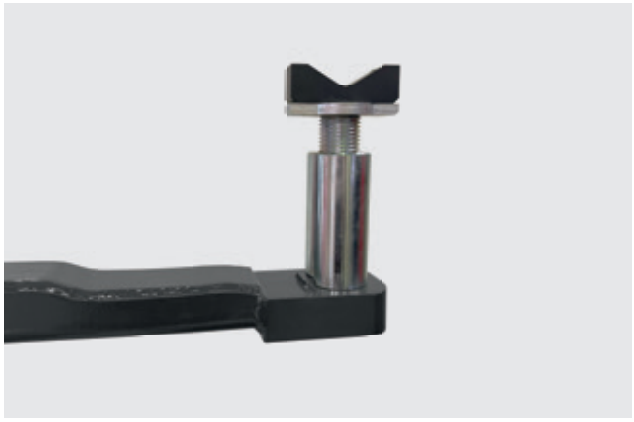

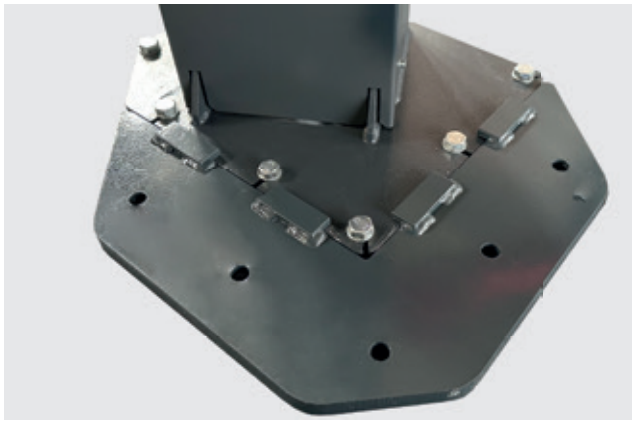






www.autopstenhoj.com

**AUTOPSTENHOJ GmbH**
Sandkampstr. 90 I 48432 Rheine
+49 5971 8602-02
info@autopstenhoj.com