Product leaflet

Industrial vacuum cleaner 216 A

High capacity dust extraction and collection



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 216 A

- Cyclonic pre-separation
- Manual filter cleaning prolongs the filter's lifetime
- High suction capacity

The 216A air powered industrial vacuum cleaner is a powerful and robust dry industrial vacuum cleaner suitable for composite handling industry, building and construction industry and chemical industry handling powder and other dry material such as dusts, grit and granules. The portable dust collector can be equipped with a HEPA filter.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Industrial vacuum cleaner 216 A

Certifications	CE
Noise level (dB(A))	74
Installation	Indoor
Material	Housing in sheet metal
Filter cleaning method	Reverse air pulse
Application	Dust, Granulate, Grit
Dustbin volume (l)	47
[ProducHoseLength]	7.5
Filter Area (m²)	1.56
Filter type	Cartridge
Weight (kg)	69

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no	Number of filter elements	Filter material	Type of hose	Compressed air requirement	Noise level (dB(A))	Max vacuum (kPa)	Hose length (m)	Hose diameter (mm)	Capacity (max airflow m3/h)
	42121603[1]	2	Paper /Microfibre	PE/C	3,0 Nm3/min	75,5	-52	7,5	51	342
	42121605[1]	1	Microfibre	PE/C	1,6 Nm3/min	74.0	-31	7,5	51	342
	42121607[1]	1	Microfibre	PE/C	2,2 Nm3/min	73.5	-42	7,5	51	360
	42121615	1	Microfibre	PE/C	2,2 Nm3/min	73.5	-42		51	360
	42121621	2	Paper /Microfibre	PE/C	1,6 Nm3/min	74.0	-31	7,5	51	342
	42121628[2]	1	Microfibre	PU12	5,3 Nm3/min	75.0	-78	7,5	51	318
	42121681	1	Microfibre	[W]	1,6 Nm3/min	74.0	-31			342
	42121683	1	Microfibre	[W]	3,0 Nm3/min	75,5	-52			342
	42121684	1	Microfibre	[W]	5,3 Nm3/min	75.0	-78			318
	42121692	1	Microfibre		1,6 Nm3/min	74.0	-31			342

[1] With cleaning set, brush, conical and toothed nozzle
[2] With abrasion plate.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Hose types

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PU12	Suitable for abrasive material Transparent polyurethane Reinforced with inbedded steel helix	- 40 deg. C. -+ 90 Deg. C.				
PEC	For cleaning applications Max vacuum 50 kPa Conductivity < 10^6 Ohm	-40°C - +60°C				

Accessories

	Accessory	Item no
	Control Sfor NE 22-76	43220001
	Control Sfor NE 22-76	43220026
	Control Sfor NE86-96	43222008
	Plastic bag S50 - 25pcs w/hole	43650102
	Plastic bag S50 - 25pcs 630x800 w/h	43650103

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

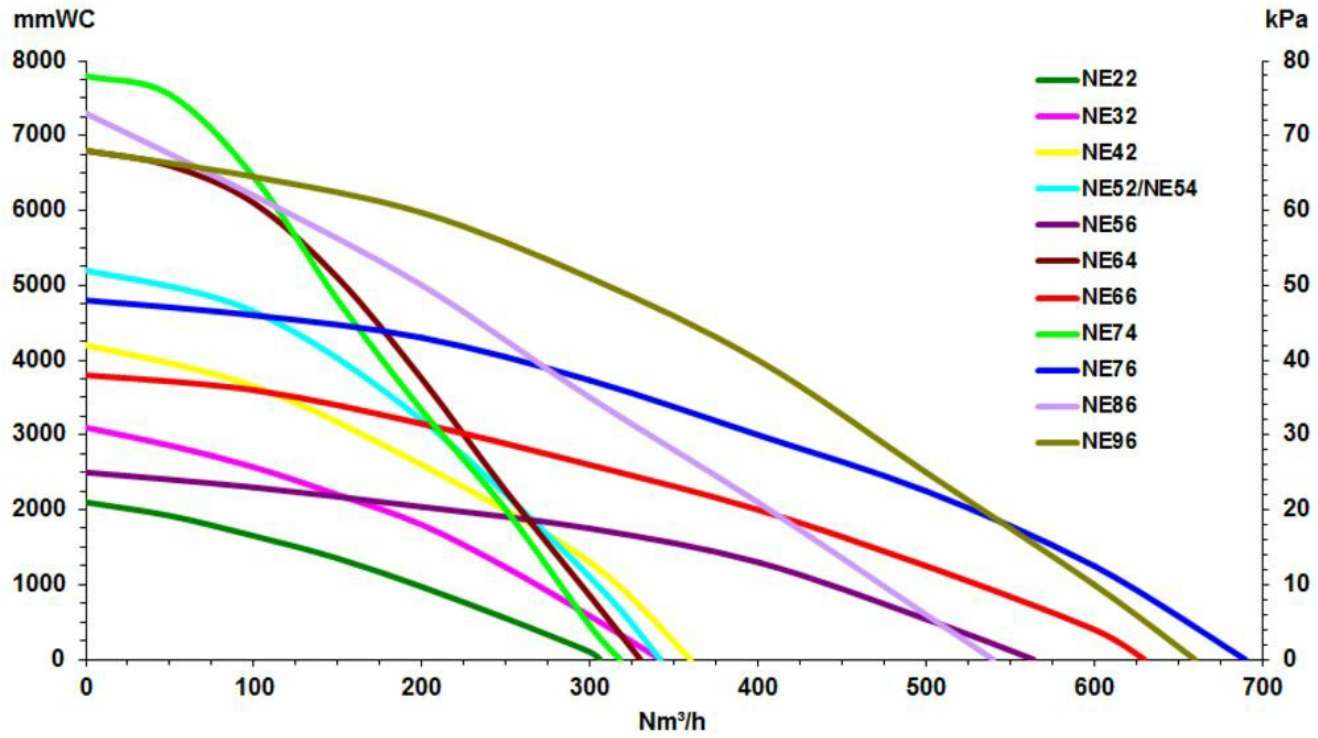

Air Powered ejectors All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB