Product leaflet

Hose Reel 883

Retractable hose reel suitable for vehicle repair shops, garages and maintenance workshops.



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Hose Reel 883

- Spring tension easily adjustable from the outside.
- Fast and easy to service.
- Simple hose replacement without dismantling the reel.

A fully plate encased and robust, medium sized retractable hose reel. A highly suitable hose reel for applications in vehicle repair and maintenance workshops.The retractable hose reel is supplied with loose quick hitch for easy installation.
The hose reel 883 is retractable and has an optimized spring force, ensuring that the hose retracts smoothly and evenly onto the drum. The high quality spring is pre-tensioned at the factory to suit a wide range of applications, and is well protected inside the drum cavity. The self retracting hose reel 883 is very easy to mount, either on walls, ceilings or floors.

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Hose Reel 883

Certifications	CE
Material	Sheet metal casing
Material recycling (%)	100
Media	Compressed air, Water, Water high pressure, Oil, Grease
Connection hose length (m)	1
Weight (kg)	15
Corrosion resistance	Standard

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no	Media	Delivered with hose	Colour	Max working pressure (Mpa)	Max hose length	Type of hose	Distribution hose length (m)	Diameter, connection hose (mm)	Distribution hose diameter (mm)
	30800783[1]	Compressed air, Water	No	Black	1,5	15				
	30800983[2]	Compressed air, Water	No	Black	1,5	10				
	30801083	Compressed air, Water	Yes	Black	1,5		B	10	12.5	12.5
	30801183[2]	Compressed air, Water, Oil	No	Black	7,5	10				
	30801383[3]	Grease	No	Black	35	15				
	30802183[1]	Water high pressure	No	Black	25	13				
	30802283	Water high pressure	Yes	Black	25		G	13	10	10
	30803883	Water high pressure	Yes	White	25		G	13	10	10
	30803783[1]	Water high pressure	No	White	25	13				
	30801283	Oil	Yes	Black	7,5		I	10	12.5	12.5
	30806183	Oil	No	White	7,5	10				
	30806283	Compressed air, Water, Oil	Yes	White	7,5		I	10	12.5	12.5
	30801883	Grease	Yes	Black	35		J	15	6	6

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Models

	Item no	Media	Delivered with hose	Colour	Max working pressure (Mpa)	Max hose length	Type of hose	Distribution hose length (m)	Diameter, connection hose (mm)	Distribution hose diameter (mm)
	30807283	Compressed air, Water	Yes	White	1,5		B	15	12.5	10
	30851683	Compressed air, Water	Yes	White	1,5		B	10	12.5	12.5
	30825283	Grease	Yes	White	35		G	15	6	6
	30825483	Grease	Yes	White	25		G	10	10	10
	30803283	Compressed air, Water, Oil	Yes	Grey	7,5		I	10	12.5	12.5
	30806083	Grease	Yes	Grey	35		J	10	10	10
	30815483	Compressed air, Water	Yes	Grey	1,5		B	15		10
	30809783[4]	[alcoholethanol]	Yes	Grey	1,5		Q	15	10	10
	30809683[4]	[alcoholethanol]	Yes	Black	1,5		Q	15	10	10
	30800883	Compressed air, Water	Yes	Black	1,5		B	15	12.5	10

[1] For 10 mm hose
[2] For 12,5 mm hose
[3] For 6 mm hose
[4] Hose couplings are 12mm (1/2")

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Hose types

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
B	Cover in NBR/PVC and inner tube in NBR. Syntethic textile braid	-30 - 100	Male, chrome plated		Hose nipple + clip	Hose nipple 1/2" + clip
G	Cover and inner tube in synthetic rubber. Single steel braid	-40 - 155	Female 60° cone, chrome plated. With rubber hose grip	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
I	Cover and inner tube in SBR based rubber. Single steel braid	-40 - 100	Female 60° cone, chrome plated	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
J	Cover and inner tube in syntetic, oil resistant rubber. Double steel braid	-40 - 100	Female 60° cone, chrome plated	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
Q	Cover in polyurethane and inner tube seamless polyamide. Singel steed braid.	-40 - 70	Female 60° cone, stainless steel	Female 60° cone, stainless steel	Male 60° cone	Male 60° cone

Accessories

	Accessory	Item no
	Roller guide.	30341550
	Pivoting bracket.	30372407
	Water gun in chromium plated brass	30400110
	Water gun in stainless steel	30400210
	Watergun EX	30400211
	High temperature water gun	30400310
	Air gun, standard.	30410110
	Swivelling coupling 3/8(m)-3/8(m)HP	30431310

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Accessories

	Accessory	Item no
	Swiv. coupling 3/8(m)-3/8(m) HP SS	30431410
	Swivl. coupl.1/2(m)-3/8(f) brass	30431510
	Swivl.coupl.1/2(m)-1/2(f) brass	30431610
	Swivel coupling 1/2(m)- 3/4 (f) bra	30431710
	Swivl. coupl. 1/2(m)-3/8(f) SS	30431810
	Swivl coupl. 1/2(m)-1/2(f) SS	30431910
	Swivl.coupl.1/2(m)-3/4(f) SS	30432010
	Inlet kit for hose reel 1/2"	30511550
	Inlet kit for hose reel	30511650

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

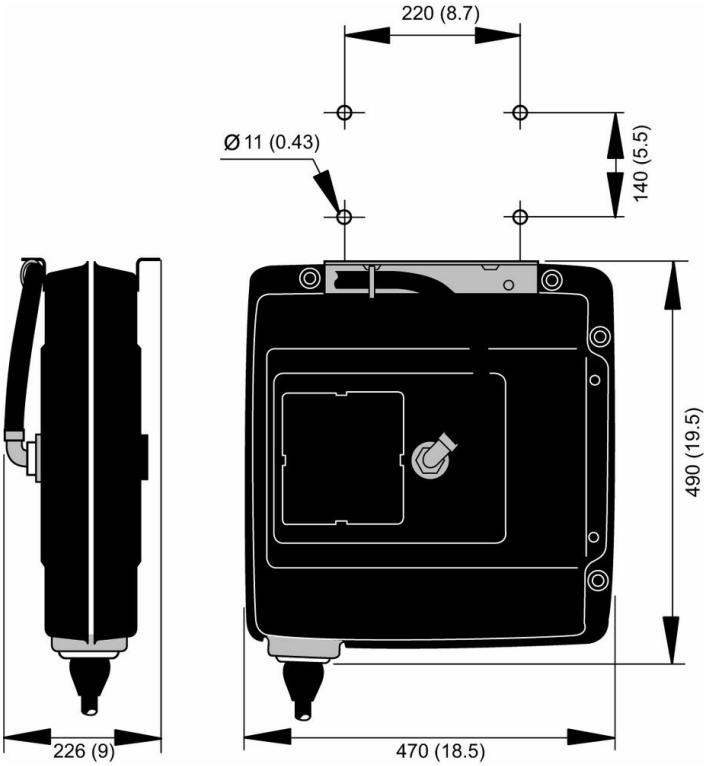

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB